

SureSite[®] Visual Level Indicators – Heavy Duty Service



TYPICAL USES FOR SURESITE[®] INDICATORS


- **Chemical Processing** – Acids, solvents, steam, refrigerants
- **Petrochemical Processing** – Hydrocarbons, steam
- **Pharmaceuticals** – Chemical, acids, heat transfer
- **Utility** – Boilers, caustics, feed water tanks

PRODUCT FEATURES


- ASME, ASTM, ANSI
- Confirmation Gauge
- Sightglass Alternative
- Rugged Construction
- High Pressure & Temp
- External Electronics
- Approvals

BENEFITS TO YOU

- Designed to B31.1, B31.3 (as needed)
- Confirm other level technologies
- Indicates true level
- Dependable in harsh environments
- Up to 4200 PSI and 750° F
- Monitor from remote & local location
- CSA, UL, CE, FM, ABS

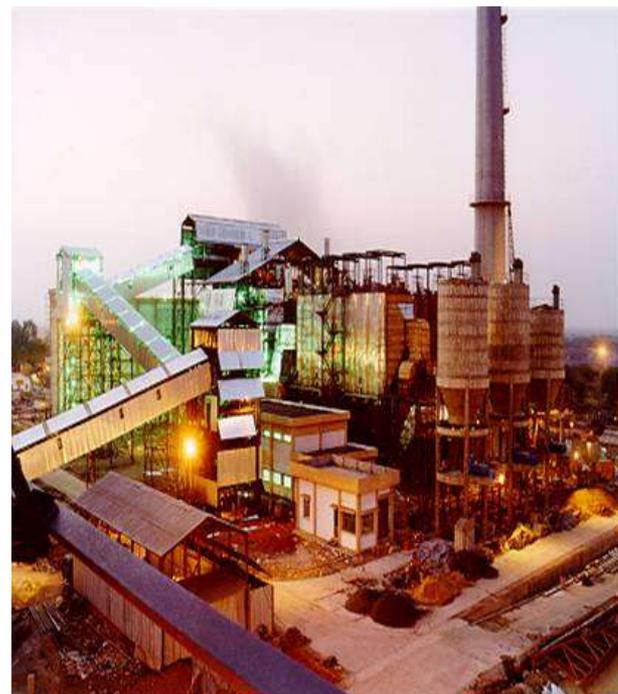

SureSite *Plus* - Redundant Level Measurement

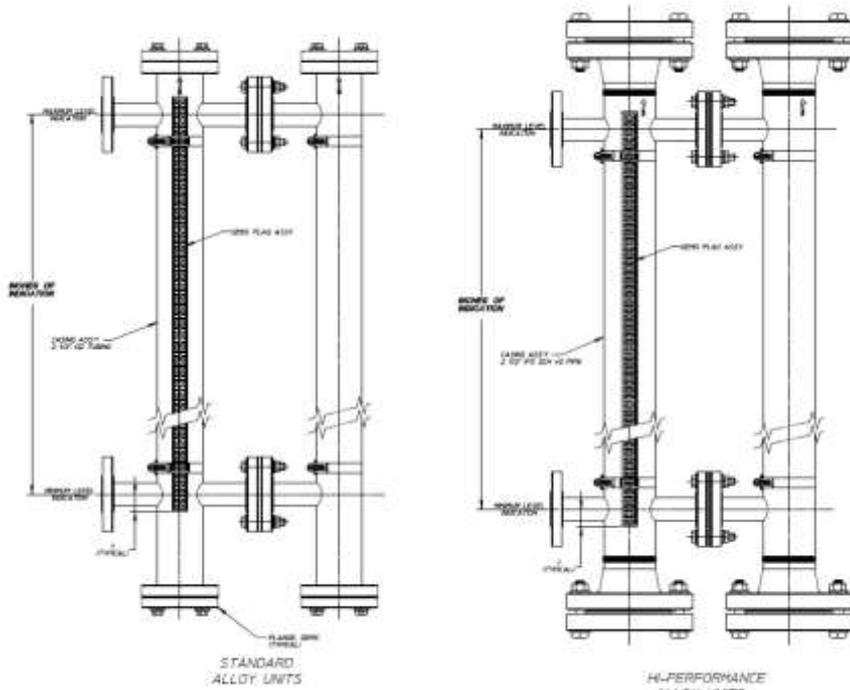

Gems Sensors is now offering redundant level measurement via bypass chamber mounting.

Use the **SureSite *Plus*** where two redundant level indicators are required.

The **SureSite *Plus*** is configurable for mounting your Guided Wave Radar unit while maintaining visual indication.

SureSite *Plus* a great fit for Condensate Hot Wells, DF & Boiler Blow-Off Tanks, Feed Water & Circ Water Level Monitoring

The **SureSite *Plus*** offers:

- High Visibility
- Durability
- Environmental Safety
- Efficient & Effective Controls

Send us your **SureSite *Plus*** requirements today!